


INSTALLATION PLAN - 安装方案

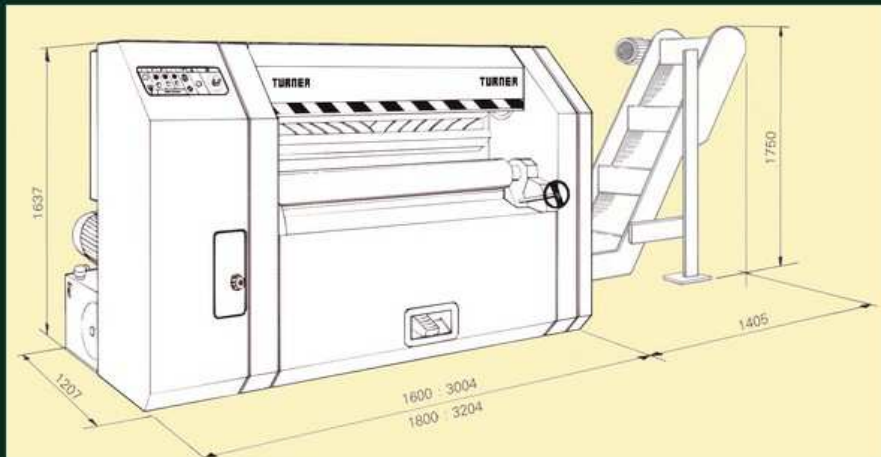

Working width	Power requirements	Bladed roller power	Closing power	Feeding power	Maximum feed speed	Net weight	Hourly output
工作宽度	总功耗	刀辊功耗	闭合功耗	皮功耗	最大进皮速度	净重	每小时产量
1600mm	17.4KW	11KW	5KW	2.5KW	45m/mn	2950KG	270
1800mm	17.4KW	11KW	5KW	2.5KW	45m/mn	3350KG	270

OPTIONS - 选配项

- 托辊液压驱动马达
✕ Carrier roller driven by hydraulic motor.
- 托辊程控自动定位
✕ Automatic positioning of the carrier roller by electronic programming.
- 横向传送带, 用于送皮
✕ Transversal conveyor belt to evacuate the skins.
- 自动润滑
✕ Automatic greasing.



TURNER

32 Avenue Daniel Mercier
07100 Annonay - FRANCE
Tel: +33 475 670 500 / Fax: +33 475 676 526
sales@turner-sas.fr / spareparts@turner-sas.fr
www.turner.fr

TURNER

HIGH QUALITY MACHINERY AND SPARE PARTS
FOR THE LEATHER INDUSTRY

CYLINDER 2

去肉机
FLESHING MACHINE

应用 APPLICATIONS

带毛绵羊皮	Wooled sheepskins
去毛绵羊皮	De-wooled sheepskins
山羊皮	Goat skins
袋鼠皮	Kangaroo skins



Haute productivité - Qualité - Fiabilité
High productivity - Quality - Reliability
Alta productividad - Calidad - Fiabilidad

STRUCTURE - 结构


铸铁机座，非常紧凑耐用。液压系和电柜直接集成在铸铁机座上。



Extremely compact and sturdy design machine, with cast-iron frames integrating directly the hydraulic bloc and the electric cupboard.

ADJUSTMENTS - 调节

- 1 - 枕架位置
- 2 - 驱动压力
- 3 - 出皮速度
- 4 - 磨削位置

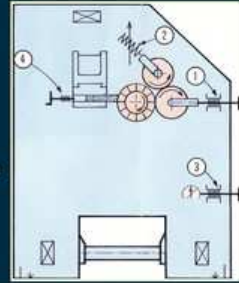

- 1 Bolster support position
- 2 Driving pressure
- 3 Feed-out speed
- 4 Grinding position

GRINDING - 磨刀

新型磨刀装置，反位布置（砂砖挂在砖架上），更加稳定可靠。

New grinding device in the reverse position (suspended grind wheel), more stable and more reliable.



机器打开时，保护系统会自动遮盖刀辊。夹持辊表面有钻石形的槽，液压马达驱动。带有减震系统，以避免在皮上留下印记。托辊挂橡胶没有驱动，或者作为选配液压马达驱动。可编程自动控制与刀辊的相对位置。



Bladed roller with automatic covering system at the opening of the machine. Grip roller with diamond-shaped grooving, driven by hydraulic motor. Shock absorption system, in order to not mark the skins. Carrier roller in rubber undriven, or driven by hydraulic motor as an option. Electronic programming with automatic positioning in relation to the bladed roller.

ROLLERS - 辊子

螺旋式千斤顶驱动，强劲、精准。为便于进皮和提高产量，经由特殊设计，机器打开时空间很大。带自动程控反复打开装置。



Powerful and accurate system driven by rotary jack. Very large opening specially designed to facilitate the introduction of the skins and to improve the output. Automatic and programmable re-opening device.

OPENING/CLOSING - 开/合